

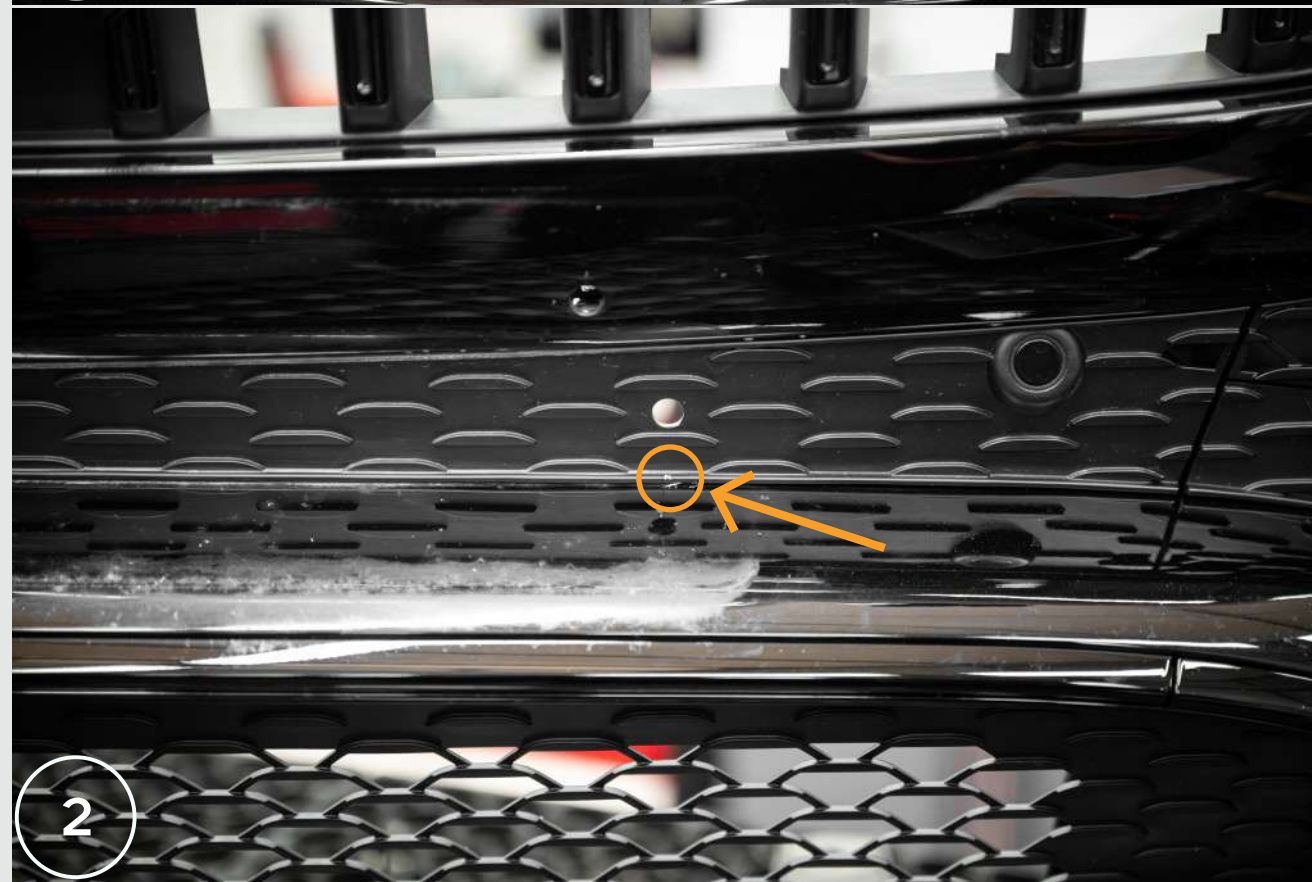
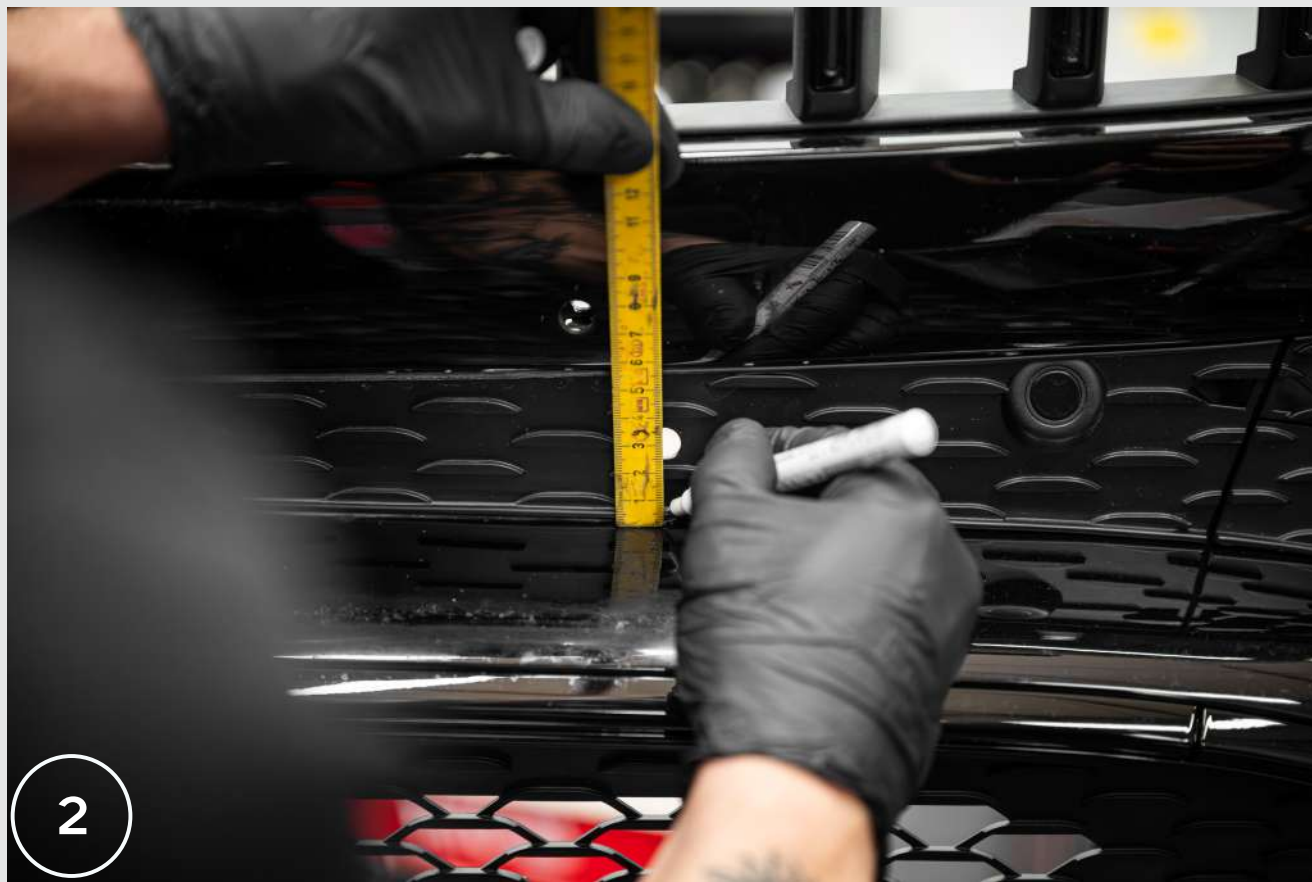
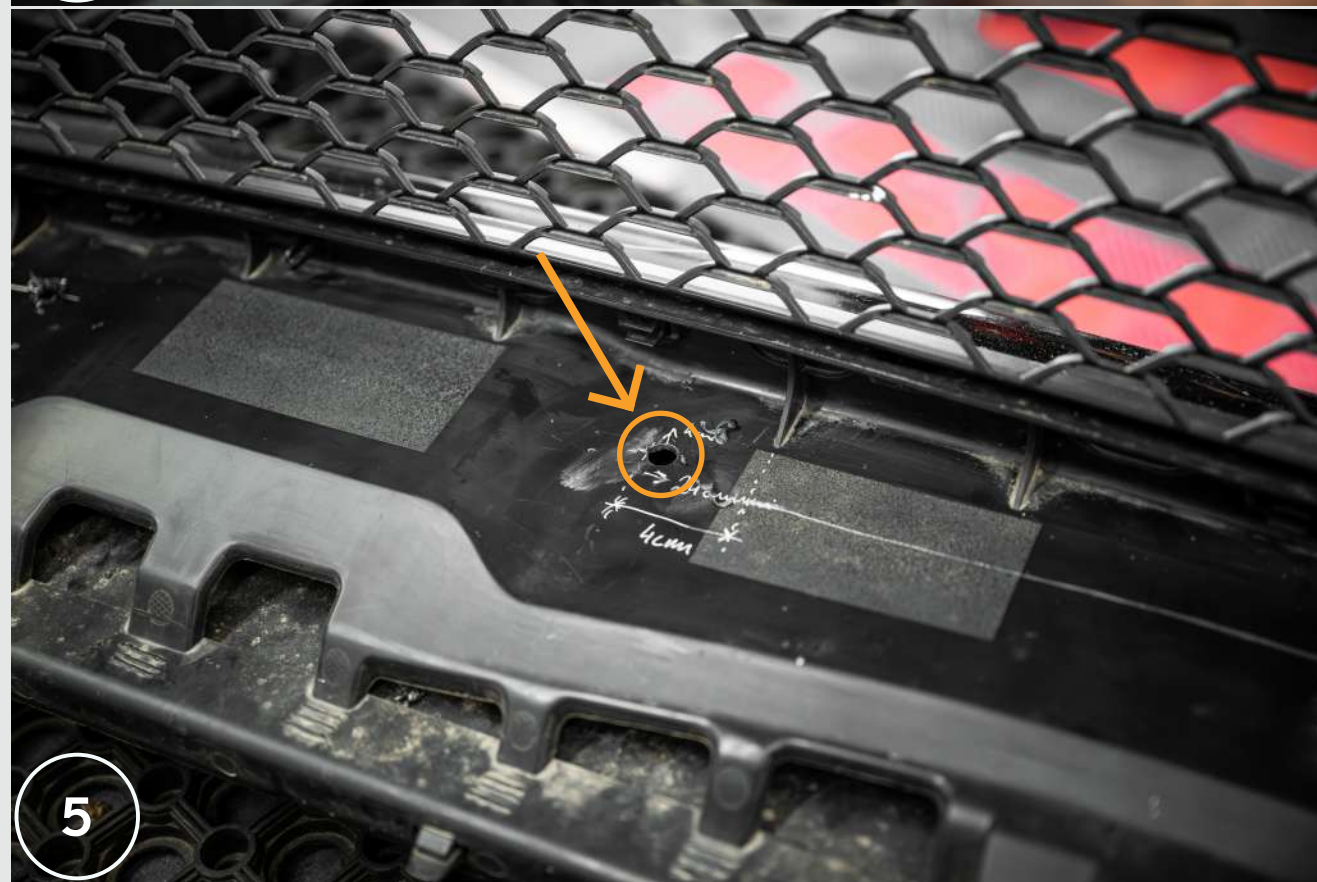


1. Remove the bumper from the car. Install the front splitter. Remove the license plate mounting plate.
2. Mark the spot on the bumper so that it exactly matches the center of the license plate mounting hole.
3. Place the mounting plate on the marked point so that the point marks the corner of the plate and trace the holes from the mounting plate.
4. Make holes in the marked places.

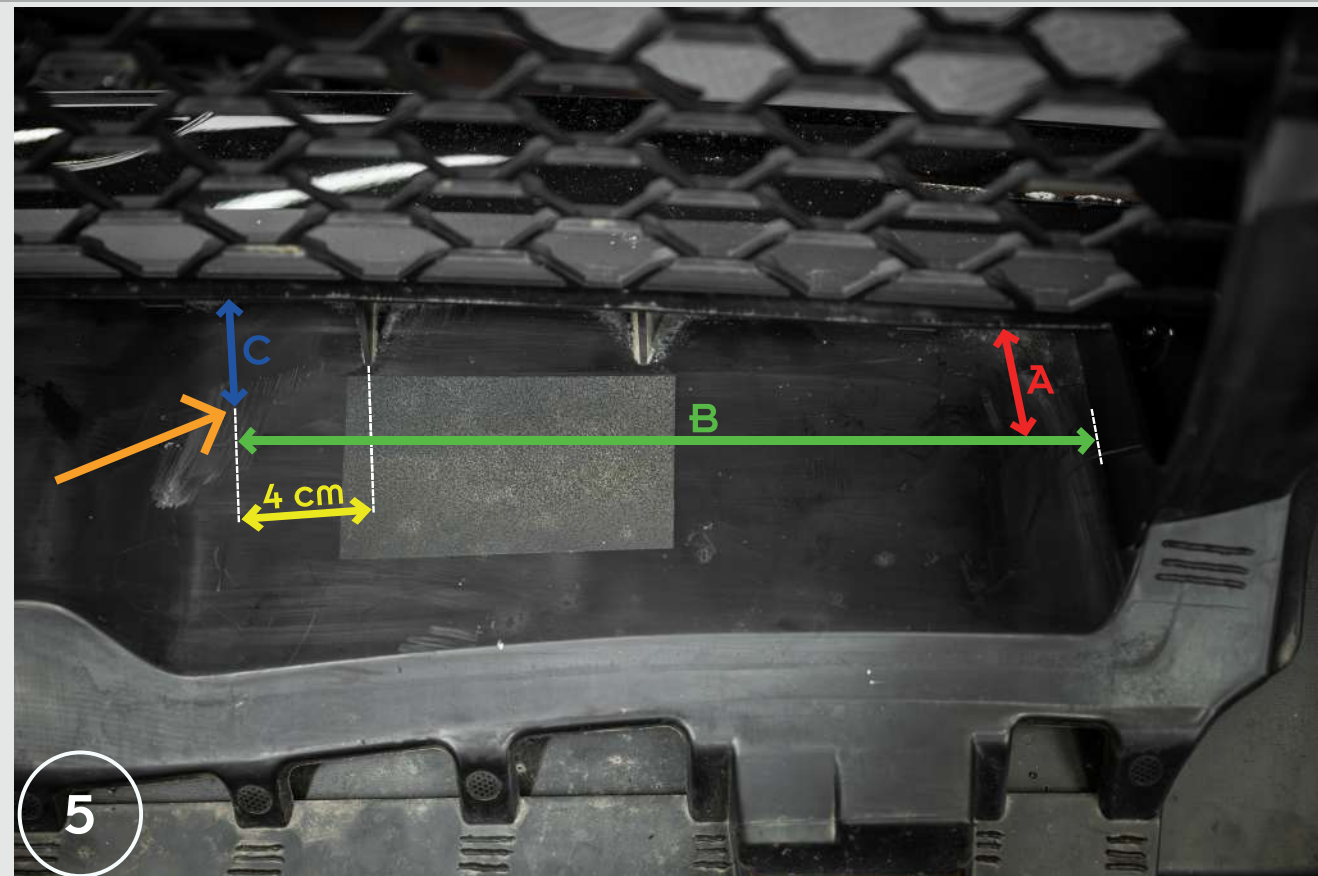

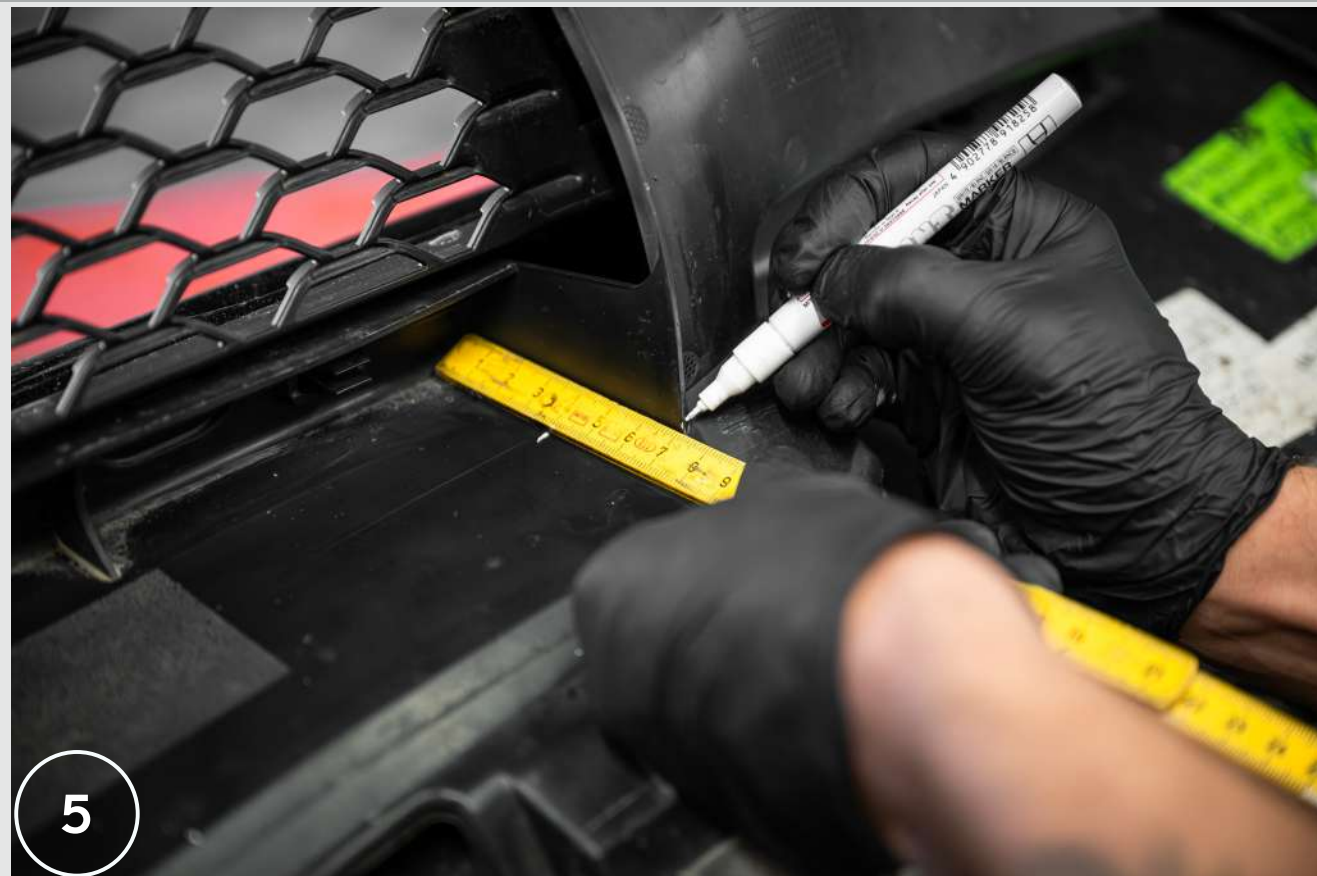


5. Mark the points on the inside of the lower part of the bumper. Measure **A** - 4 cm, **B** - 24 cm, **C** - 4 cm. Mark the point in the place **marked** in this way. Perform the operation on the left and right side of the bumper.

6. Make holes in the marked places.

7. Enlarge the holes.

8. Also drill the holes created on the bottom of the splitter so that the hole through the splitter and bumper is clear.

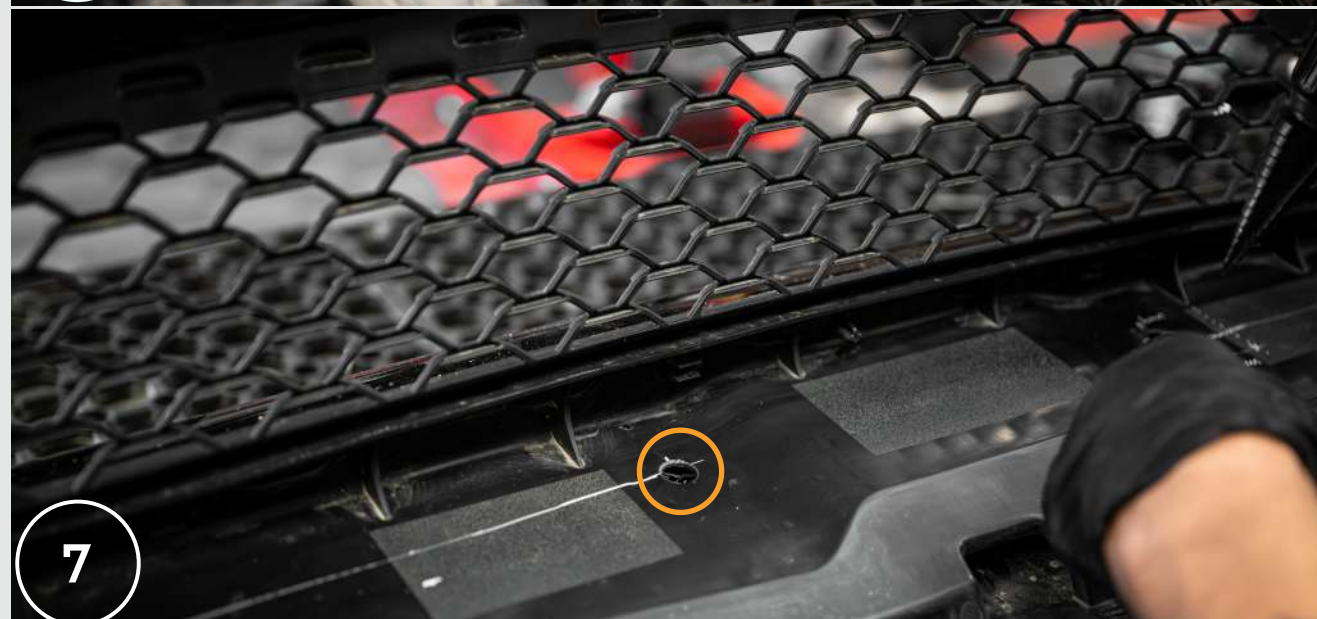



9. Insert the pin screws through the holes made so that they pass through all of the mounting holes.

10. Put the masking sleeves on the pin screws.

11. Put the mounting plate on the pin screws from the top of the bumper.

12. Tighten the whole thing using washers and nuts. Then mount the license plate mounting and mount the bumper. The reinforcement will not be visible on the bumper.

